

# SE8、SE10 Series


## Specifications

Model	Operating Voltage (V)	Rated Voltage (V)	No Load Speed (min <sup>-1</sup> )	No Load Current (mA)	Rated Load		Rated Load Speed (min <sup>-1</sup> )	Rated Load Current (mA)	Starting Torque	
					(gf·cm)	(mN·m)			(gf·cm)	(mN·m)
SE8G06T	2 to 5	4.3	9,908	30.0	3.06	0.3	6,890	103	10.05	0.985
SE8G75T	2 to 5	2.8	10,335	34.8	5.0	0.49	4,880	240	9.47	0.928

Model	Operating Voltage (V)	Rated Voltage (V)	No Load Speed (min <sup>-1</sup> )	No Load Current (mA)	Rated Load		Rated Load Speed (min <sup>-1</sup> )	Rated Load Current (mA)	Starting Torque	
					(gf·cm)	(mN·m)			(gf·cm)	(mN·m)
SE10J95T	4 to 6	5	11,487	58	20.4	2	4,143	567	31.6	3.1


## Dimensions (unit : mm)

SE8G

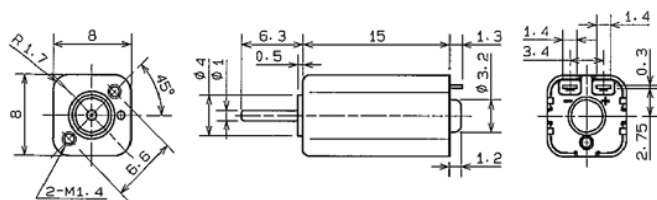

Weight : 3.9g(Approx.)

SE10J

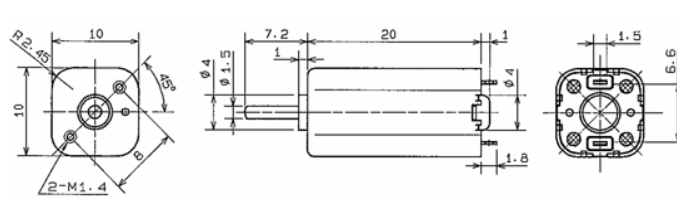


Weight : 7.7g(Approx.)


## Characteristics

SE8G

SE8G06T-4.3V

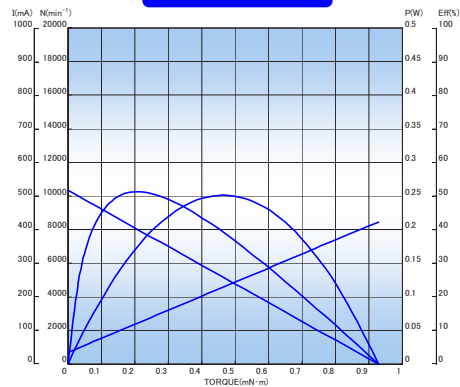

SE8G75T-2.8V

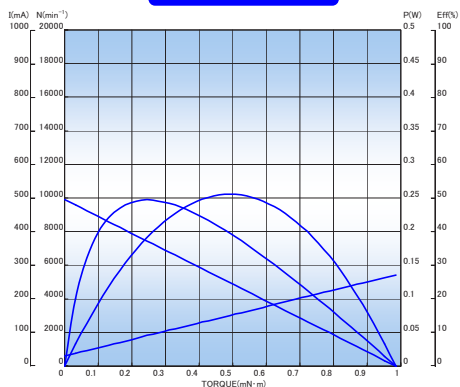

SE10J

SE10J95T-5V

