

General Specifications

Motor Protection: Auto Restart/Polarity Protection
 Insulation Resistance: 10M Ohms or over with a DC500V Megger
 Dielectric Withstand Voltage: AC 700V 1st
 Allowable Ambient Temperature Range:
 -10 degrees C ~ +70 degrees C (Operating)
 -40 degrees C ~ +70 degrees C (Storage)
 (non-condensing environment)


Material

Casing: Plastic (Black) UL94V-0
 Casing Upper: Steel
 Impeller: Plastic (Black) UL94V-0
 Lead Wire: UL1061, AWG26, +Red, -Black


06920GA product picture



06920GA characteristic curve

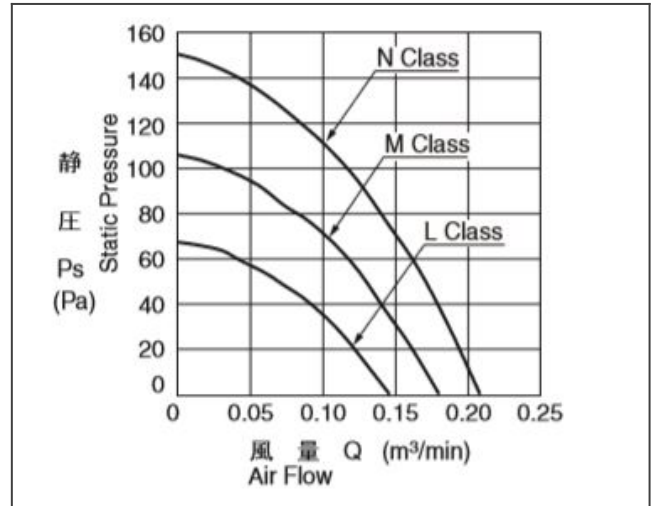

06920GA product drawing

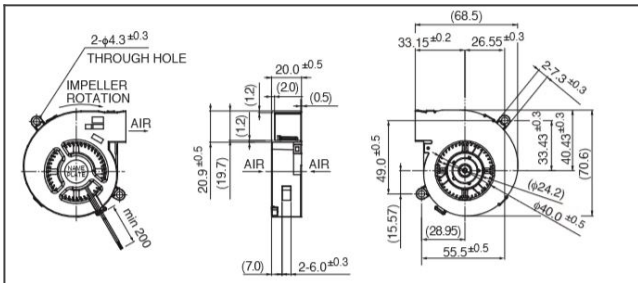

Detailed Specifications

Expected Life: 25 degree C 70,000 Hours (L10)

DC Blowers: Ball Bearing Blower

Nominal Voltage: 12

Operating Voltage Lower: 6

Operating Voltage Upper: 13.8

Industry: Food Processing / Power Tools / Industrial Machines / Medical Equipment / Consumer Technology

Nominal Current: 0.25

Input Power: 3

Speed: 4100

Max. Air Flow: 0.2

Max. Air Flow: 7.1

Max. Static Pressure: 150

Max. Static Pressure: 0.6

Noise: 33

Mass: 55

Blower Size: 69

Blower Width: 20

DC Blowers